

Mixed Use Development – Phase 2

950 Phenix Avenue
Cranston, Rhode Island

PREPARED FOR

BCPSTOR Development, LP
Robert Consalvo
330 E Crown Point Road
Winter Garden, FL 34787
407.535.1060

PREPARED BY



1 Cedar Street, Suite 400
Providence, RI 02903
401.272.8100

November 22, 2021

Table of Contents

Long Term Stormwater Operation and Maintenance Measures	1
Owner/Operator Responsible for Operation and Maintenance	1
Maintenance of Stormwater Systems.....	1
Pavement Systems.....	1
Structural Stormwater Management Devices.....	2
Vegetated Stormwater Management Devices.....	2
Pollution Prevention and Source Control.....	5



1

Long Term Stormwater Operation and Maintenance Measures

Owner/Operator Responsible for Operation and Maintenance

BCPSTOR Development, LP
Robert Consalvo
330 E Crown Point Road
Winter Garden, FL 34787

Maintenance of Stormwater Systems

The following maintenance program shall ensure the continued effectiveness of the structural water quantity and quality controls shown on the project Site Plans prepared by VHB. Refer to the attached Operation and Maintenance Location Plan.

Pavement Systems

Regular Asphalt Pavement

- › Sealants for asphalt pavement are a major source of polycyclic aromatic hydrocarbons (PAHs) in our environment. Asphalt based sealants are allowed. Coal-tar based sealants are not allowed.

- › Sweep or vacuum standard asphalt pavement areas at least once per year with a commercial cleaning unit and properly dispose of removed material.
- › More frequent sweeping of paved surfaces will result in less accumulation in catchment areas, less cleaning of subsurface structures, and less disposal costs.

Structural Stormwater Management Devices

Catch Basins

- › Inspect the unit post construction, prior to being placed into service and ensure unit is clean and free of any structural damage.
- › Inspect quarterly for the first year to determine the oil and sediment accumulation rate.
- › Cleaning is required annually and whenever the depth of sediment is greater than or equal to half the sump depth.
- › Inspect the units immediately after an oil, fuel or chemical spill.
- › A licensed waste management company should remove oil and sediment and dispose per state and local regulations.

Roof Drain Leaders

- › Perform routine roof inspections twice per year.
- › Keep roofs clean and free of debris.
- › Keep roof drainage systems clear.
- › Keep roof access limited to authorized personnel.
- › Clean inlets twice per year as necessary.

Vegetated Stormwater Management Devices

Surface Infiltration/Detention Basins

- › Initial Post-Construction Inspection.
- › Infiltration basins should be inspected after every major storm for the first few months to ensure proper stabilization and function. After that, inspections shall be done on an annual basis and after storm events greater than or equal to the 1-year storm or 2.7 inches of rainfall.

Long-Term Maintenance

- › The grass on the side slopes and in the buffer areas should be mowed at least 4 times annually, and grass clippings, organic matter, and accumulated trash and debris removed, at least twice during the growing season.
- › Eroded or barren spots should be reseeded immediately after inspection to prevent additional erosion and accumulation of sediment.
- › Deep tilling can be used to break up a clogged surface area.

- › Sediment should be removed from the basin as necessary. Removal procedures should not take place until the floor of the basin is thoroughly dry.

Inspections and Cleaning

- › Infiltration basins should be inspected at least twice a year to ensure proper stabilization and function.
- › Visual inspection for erosion and gulying, damage to structural components, embankment stability, and accumulation of sediment.
- › Light equipment, which will not compact the underlying soil, should be used to remove the top layer.

Sediment Forebay

- › Inspect the forebay yearly and remove any deposited sediment (sand from winter sanding operations). Correct any ponding, erosion, and replant any vegetation that has died. Reset or replace any dislodged stones.

Stone Diaphragm, Energy Dissipaters and Rip-rap Maintenance

- › The stone areas shall be inspected annually for missing or dislodged stones. Replace stone as necessary.
- › Deposited sediments shall be removed manually at least once per year.
- › Trash and debris shall be removed as necessary.

General Vegetated Areas Maintenance

Although not a structural component of the drainage system, the maintenance of vegetated areas may affect the functioning of stormwater management practices. This includes the health/density of vegetative cover and activities such as the application and disposal of lawn and garden care products, disposal of leaves and yard trimmings.

- › Inspect planted areas on a semi-annual basis and remove any litter.
- › Maintain planted areas adjacent to pavement to prevent soil washout.
- › Immediately clean any soil deposited on pavement.
- › Re-seed bare areas; install appropriate erosion control measures when native soil is exposed or erosion channels are forming.
- › Plant alternative mixture of grass species in the event of unsuccessful establishment.
- › The grass vegetation should be cut to a height between three and four inches.
- › Pesticide/Herbicide Usage – No pesticides are to be used unless a single spot treatment is required for a specific control application.
- › Fertilizer usage should be avoided. If deemed necessary, slow release fertilizer should be used. Fertilizer may be used to begin the establishment of vegetation

in bare or damaged areas, but should not be applied on a regular basis unless necessary.



2

Pollution Prevention and Source Control

A comprehensive source control program will be implemented at the Site, which includes the following components:

- › Regular pavement sweeping and vacuuming as defined previously in this manual.
- › Asphalt pavement sealants are a major source of polycyclic aromatic hydrocarbons (PAHs) in our environment. Asphalt based sealants are allowed. Coal-tar based sealants are not allowed.
- › Catch basin cleaning.
- › Clearing litter from the parking area, islands, and perimeter landscape areas.
- › Trash and recycling receptacles must be provided with regular collection.
- › Enclosure and regular maintenance of all dumpsters.
- › Spill Prevention training. Maintenance personnel will be instructed in the proper clean-up procedures for spilled materials and the location of clean-up materials. Any washing water used on machinery will be discharge to the sanitary sewerage system after filtering of sediment.
- › Sand and deicing chemicals shall be stored under cover so as to prevent exposure to stormwater. Use calcium chloride and calcium magnesium acetate (CMA) in sensitive ecosystem areas.
- › Snow storage areas will be managed to prevent blockage of storm drain catch basins and stormwater drainage swales. Snow combined with sand and debris may block a storm drainage system, diminishing the infiltration capacity of the system and causing localized flooding.

- › Snow shall not be dumped into any water body, pond, or wetland resource area.
- › Grounds Management:
 - Conduct soil evaluation every 1-3 years to determine suitability for supporting lawn, and to determine how to optimize growing conditions.
 - Mowing and thatch management.
 - Weed management.
 - Pest management.
 - Sensible irrigation.

Inspection Date: ____/____/____ Inspection Performed By: _____

Regular Asphalt Pavement Areas – Sweep or vacuum pavement at least once per year with a commercial cleaning unit and properly dispose of removed material. More frequent sweeping will result in less accumulation in other stormwater features.

Street Name	Inspected (Y/N)	Sediment Depth (inches)	Cleaning needed (Y/N)	Date Cleaned	Comments (Trash, Oil, Pet waste, Lawn Debris, Damage)
Parking Lot				/ /	

Catch Basins – Inspect quarterly for first year to determine oil and sediment accumulation rate. Clean annually and when sediment depth is greater than half the sump depth.

Catch Basin	Inspected (Y/N)	Sediment Depth (inches)	Cleaning needed (Y/N)	Date Cleaned	Comments (Trash, Oil, Pet waste, Lawn Debris, Damaged)
CB-401				/ /	
CB-402				/ /	
CB-403				/ /	
CB-404				/ /	
CB-407				/ /	
CB-408				/ /	
CB-409				/ /	
CB-410				/ /	
CB-411				/ /	
CB-413				/ /	

Roof Runoff Downspouts – Inspect downspouts and roofs twice per year. Keep roofs clean of debris. Clean inlets twice per year.

Bldg #	Inspected (Y/N)	Sediment Depth (inches)	Cleaning needed (Y/N)	Date Cleaned	Comments (Trash, Oil, Pet waste, Lawn Debris, Damage)
Bldg 3				/ /	

Inspection Date: ____/____/____ Inspection Performed By: _____

Surface Infiltration/Detention Basins – Inspect every major storm for first few months, after that, inspect at least twice a year and after storm events greater than or equal to 1-year storm or 2.7 inches of rainfall. Inspect for erosion and gullyng, damage to structural components and accumulation of sediment. Remove top layer with light equipment which will not impact underlying soil.

Basin	Inspected (Y/N)	Sediment Depth (inches)	Cleaning needed (Y/N)	Date Cleaned	Comments (Trash, Oil, Sediment, Damage)
INF 1				/ /	
INF 4				/ /	

Sediment Forebay – Inspect annually and remove any deposited sediment. Correct any ponding and erosion, and replant vegetation, as needed. Reset or replace any dislodged stones.


Sediment Forebay	Inspected (Y/N)	Sediment Depth (inches)	Cleaning needed (Y/N)	Date Cleaned	Comments (Trash, Oil, Pet waste, Lawn Debris, Damage)
SFB 4				/ /	

Stone Diaphragms – Inspect annually, replace any dislodged rip-rap, remove sediment and excess vegetation, and remove any debris.

Outfall	Inspected (Y/N)	Sediment Depth (inches)	Cleaning needed (Y/N)	Date Cleaned	Comments (Trash, Oil, Pet waste, Lawn Debris, Damage)
SD1				/ /	
SD2				/ /	

Landscape Areas - Inspect twice per year. Remove any deposited sediment, leaf litter and debris. Reseed or replace any vegetation that has died. Keep mowed to about 4-inches. Fertilizer usage should be avoided. If needed, a slow release fertilizer should be used.

Areas	Inspected (Y/N)	Sediment Depth (inches)	Cleaning needed (Y/N)	Date Cleaned	Comments (Trash, Oil, Pet waste, Lawn Debris, Damage)
Perimeter and interior island landscaping				/ /	

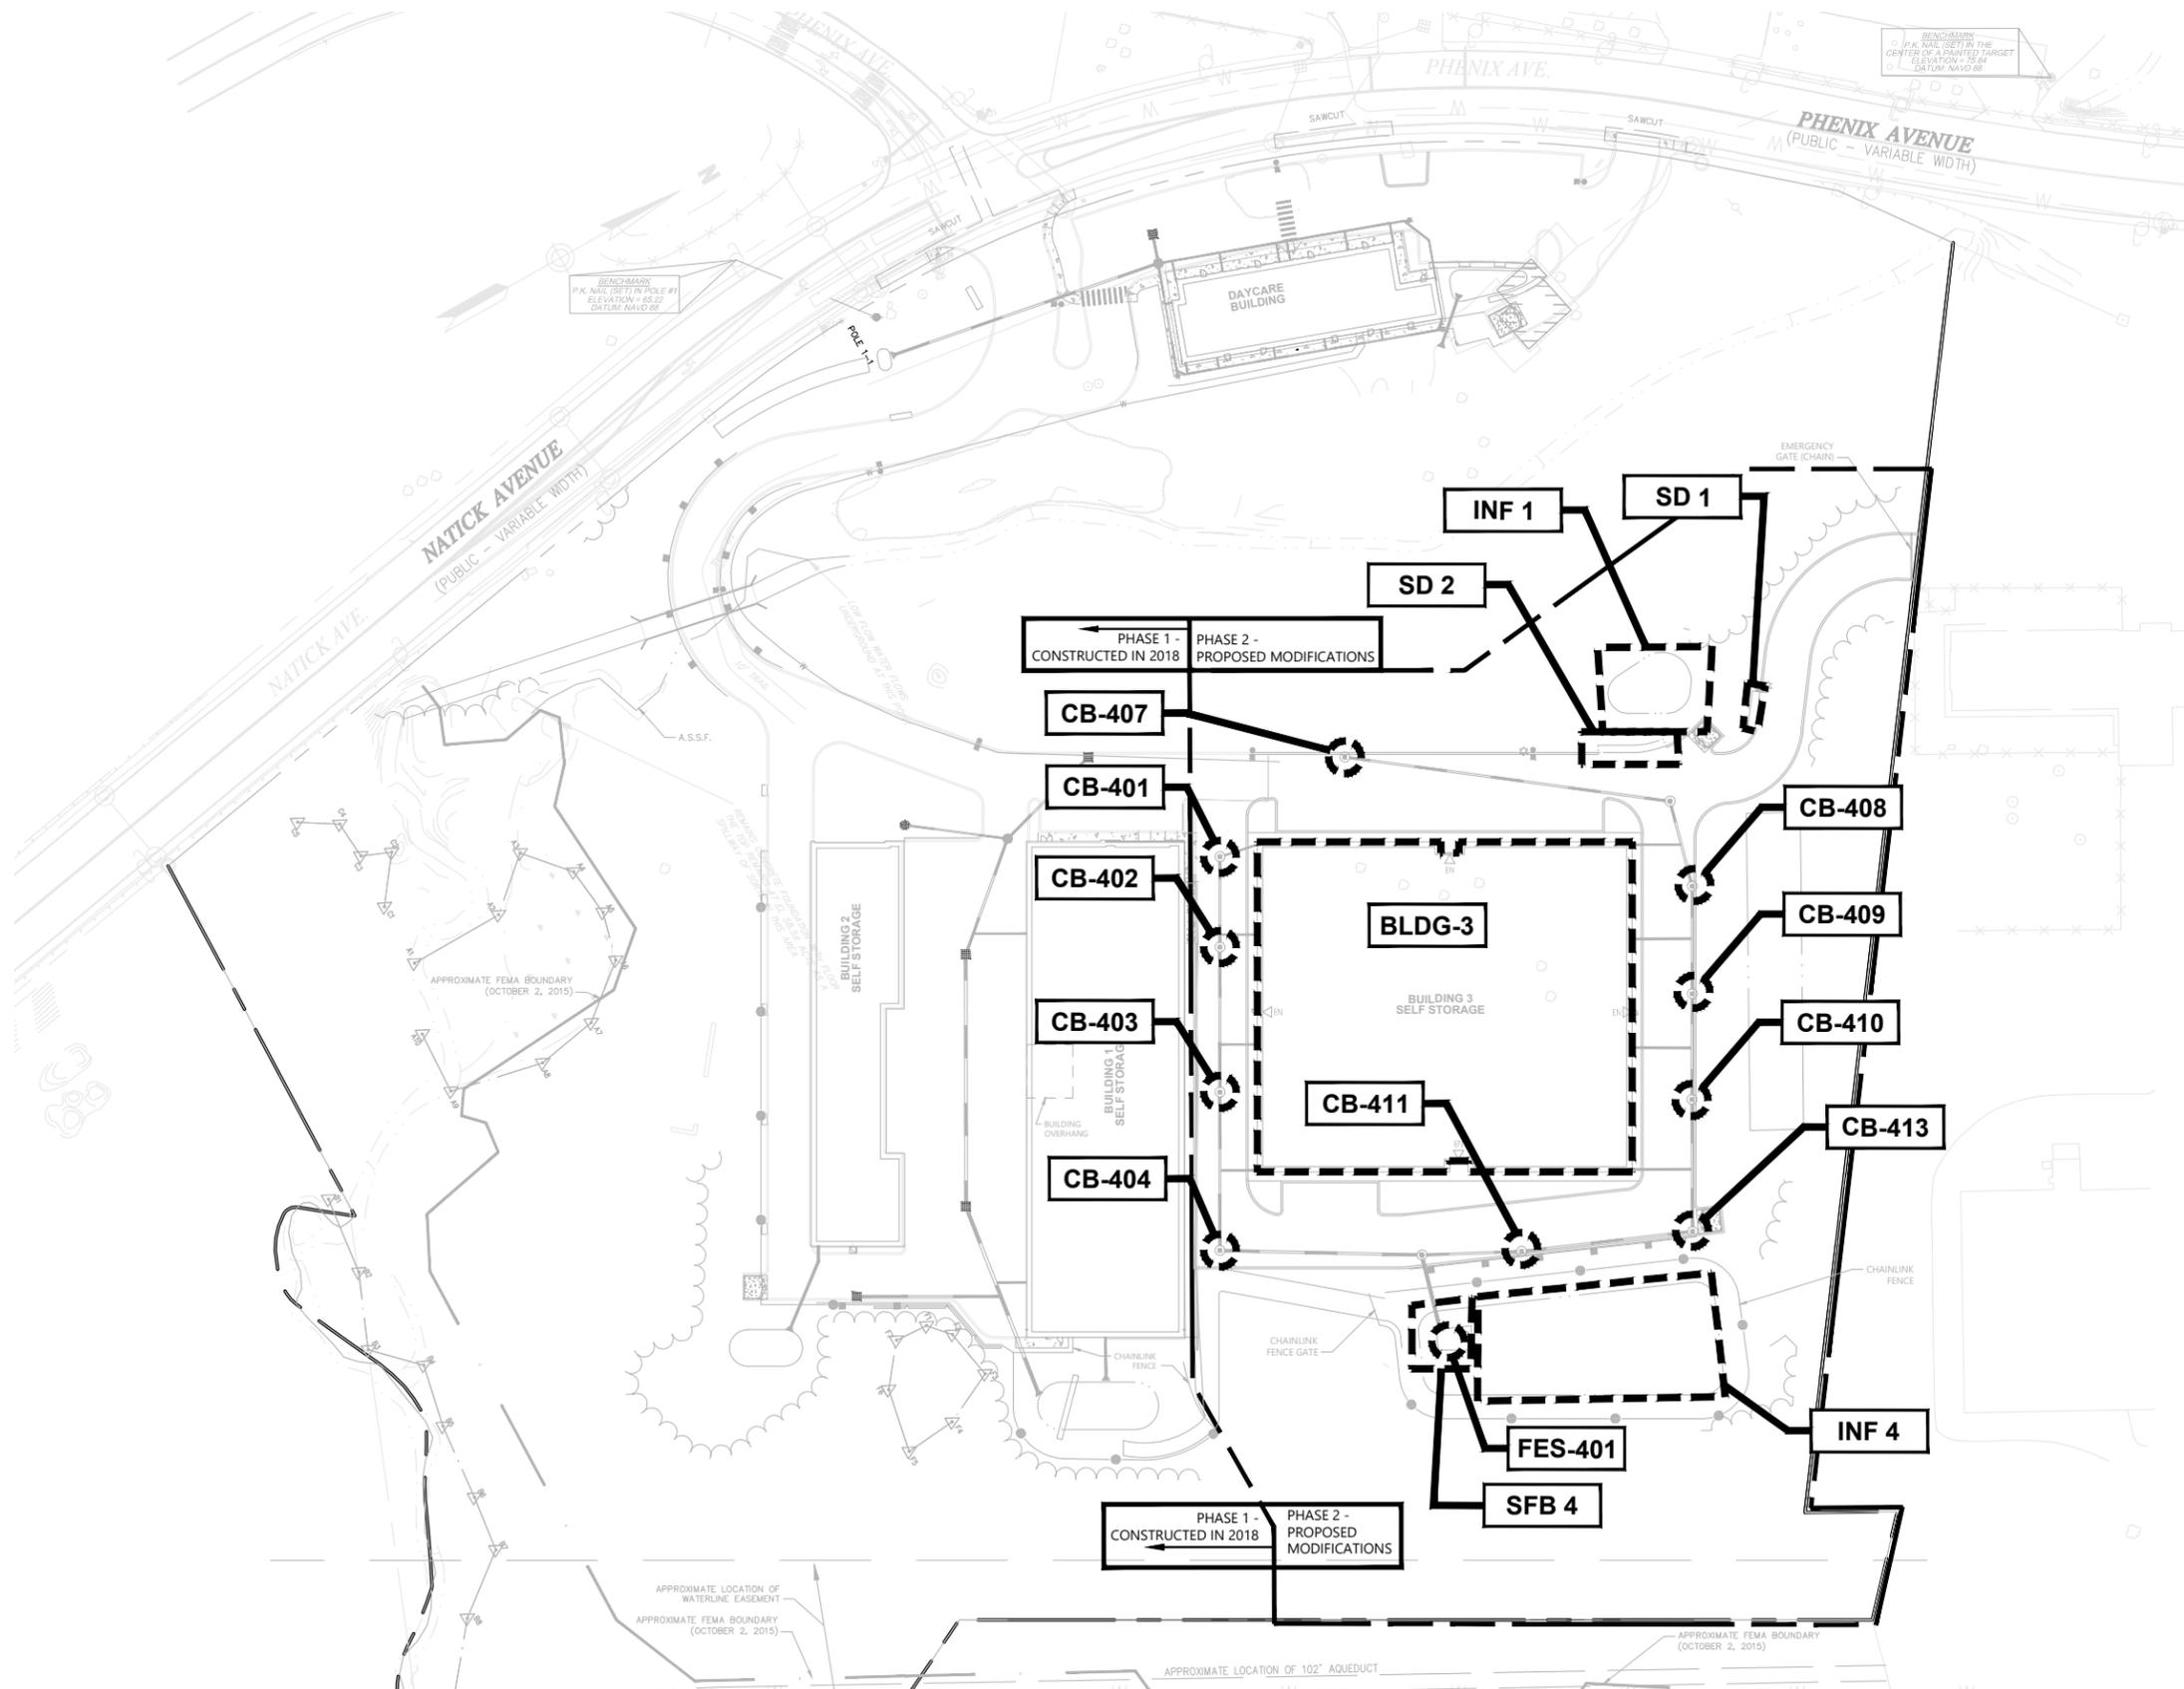

LEGEND	
CB	CATCH BASIN (SUMP)
FES	FLARED END SECTION
INF	INFILTRATION BASIN
SD	STONE DIAPHRAGM
SFB	SEDIMENT FOREBAY

